

Compact Telehandlers

Turbofarmer 33.7





— not available
● standard
○ optional

PERFORMANCE AND FEATURES

Performance

Unladen weight (kg)
Maximum load capacity (kg)
Lift height (m)
Maximum reach (m)
Lift height at max. load capacity (m)
Reach at max. load capacity (m)
Load capacity at max. lift height (m)
Load capacity at max. reach (kg)
Boom side-shift (mm)
Frame levelling (%)
Boom section

Powertrain

Engine
Range/Cylinders
Engine power (kW/HP)
Anti-pollution technology
Reversible Fan
Maximum speed (km/h)
Fuel tank capacity (l)
AdBlue tank capacity (l)
Hydrostatic transmission
EPD
Joystick autoaccelerante
Axles
Reducers
Brakes
Automatic parking brake

Hydraulic

Hydraulic pump
Delivery / pressure (L / MIN - BAR)
Hydraulic oil tank capacity (l)
Auxiliary hydraulic service on boom
Rear service line

Cab

Cab finishing
ASCS
FOPS II Cab
ROPS Cab
Controls
Tilting cab
Reverse shuttle

Configuration

Hydropneumatic Suspension CS Merlo
Hydropneumatic Suspension BSS Merlo
Hydropneumatic Suspension EAS Merlo
Work lights on cab
Sun-shade in the cab
Tac-lock
Pre-arrangement for aerial work platform
Two floating forks
Pedal Inching-Control
Permanent four-wheel drive
All wheel steering
Three steering way
Standard tyres
OPT tyres
Hydraulically controlled stabilizers
Turret rotation
Tractor type approval
Pneumatic brakes (ton)
Hydraulic brakes (ton)
PTO

TF33.7-115LEE

6600
3300
6.5
3,5
5.6
1.6
2300
1300
-
-
2

Deutz TCD 3.6
3600/4
85/115
Tier 3
●
40
85
●
PLUS
●
Axial
Epicyclic
Dry discs
●

LS+FS
125 - 210
85
●
○

Standard
Full
●
●
Electronic joystick control
—
Dual reverse

—
○
—
○
○
●
○
●
●
●
●
●
400/70 - 20
405/70-24
—
—
—
—
○
-

TF33.7-115EE

6600
3000
6,5
3,5
5.6
1.6
2300
1300
-
-
2



Deutz TCD 3.6
3600/4
85/115
Tier 3
●
40
85
●
PLUS
●
Axial
Epicyclic
Dry discs
●

LS+FS
125 - 210
85
●
○

Standard
Full
●
●
Electronic joystick control
—
Dual reverse

—
○
—
○
○
●
○
●
●
●
●
●
400/70 - 20
405/70-24
—
—
—
—
○
-

Diagramma di carico

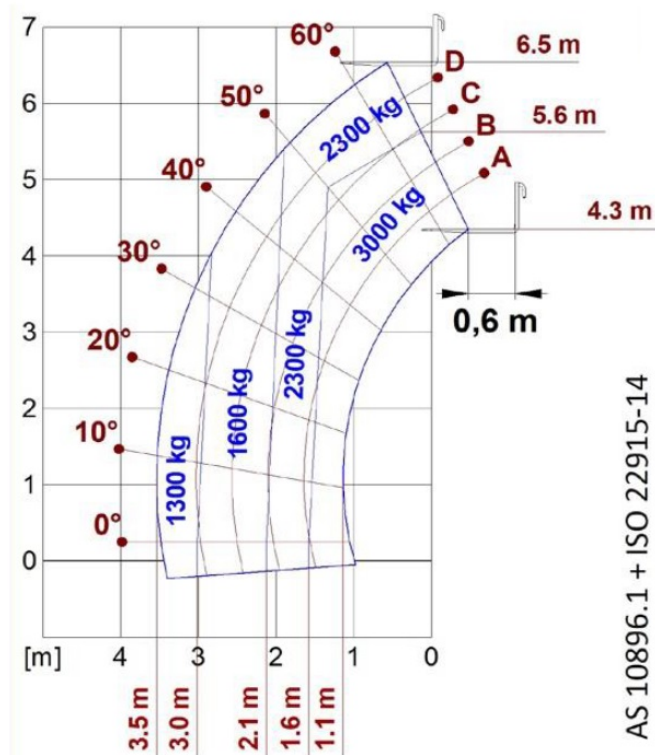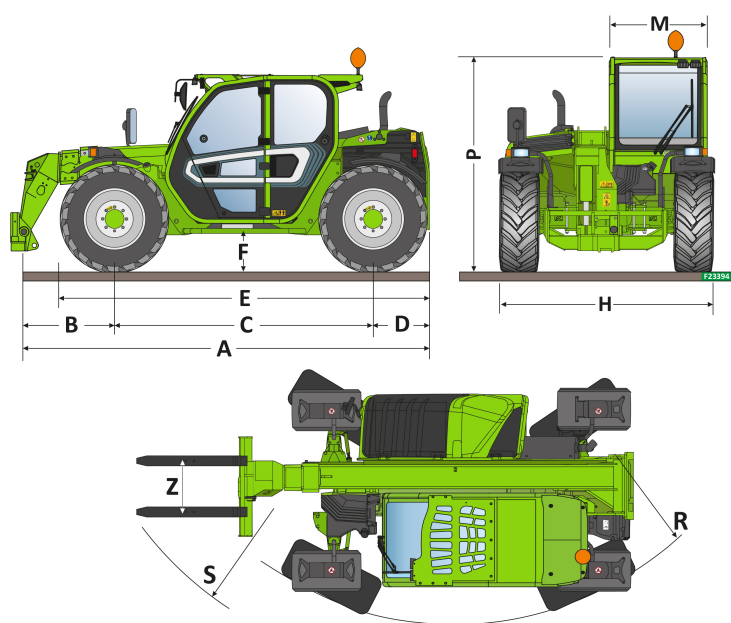


Dimensions



	TF33.7-115LEE	TF33.7-115EE	
A - Length	4310	4310	
C - Wheelbase	2740	2740	
F - Ground clearance	290	290	
H - Width	2100	2100	
M - Cabin width	1010	1010	
P - Height	2020	2120	
R - Turning radius at wheels	3930	3930	
S - Turning radius at forks	4660	4660	

Your Merlo dealer



MERLO S.P.A.

Via Nazionale, 9

12010 S. Defendente di Cervasca, (Cuneo) Italia

Tel. +39 0171 614111

Fax +39 0171 684101

info@merlo.com

www.merlo.com



